



# MONTANARO F. L L I SRL

## Officina Macchine Enologiche

Via Cav. O. Riccaddonna 218 – 14053 CANELLI (AT)

Tel. E Fax +39 0141 82.36.11

E-mail: [info@montanarofratelli.com](mailto:info@montanarofratelli.com)

Internet: [www.montanarofratelli.com](http://www.montanarofratelli.com)

COD. FISCALE E P.IVA 01429500059  
NR. REG. IMPR CC.IAA AT: 01429500059  
CAP. SOC. EURO: 12.000,00 i.v.

## POMPA STRAZZARI PER UVA E VINACCIA A ROTORE ELLITTICO IN ACCIAIO INOX

### POMPA SERIE G6-150/S

Pompa per uva e vinaccia a rotore ellittico in Acciaio INOX (Rotore Ø 300x150), BREVETTATA. Particolarmente adatta al travaso di uva e vinaccia.

Agisce per pressione e non per forza centrifuga, assicura il miglior trattamento possibile al prodotto pompato evita la rottura dei raspi e la frantumazione di buccia e vinaccioli.


Ingrassatore automatico sulle tenute del riduttore.

Cono di scarico imbullonato, senza cerniere, apribile per l'ispezione di tutto l'interno pompa, attacco Garolla Ø 100.

Tramoggina mm. 700X640h. 380 INOX, fissa, non reclinabile, completa di griglia di protezione coclea inox.

Carrello INOX per il trasferimento in azienda su ruotine e tamponi antivibranti per lo stazionamento a terra. Motoriduttore HP 5,5 380 Volt e interruttore d'arresto.

Portata: 140/150 Q/H (subordinati a tubazioni adeguate e prodotto scorrevole).

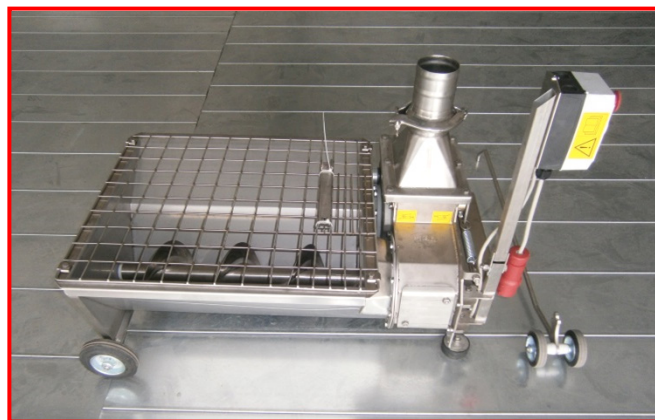



# MONTANARO F. L L I SRL

## Officina Macchine Enologiche

Via Cav. O. Riccaddonna 218 – 14053 CANELLI (AT)

Tel. E Fax +39 0141 82.36.11

E-mail: [info@montanarofratelli.com](mailto:info@montanarofratelli.com)

Internet: [www.montanarofratelli.com](http://www.montanarofratelli.com)

COD. FISCALE E P.IVA 01429500059  
NR. REG. IMPR CC.IAA AT: 01429500059  
CAP. SOC. EURO: 12.000,00 i.v.

## STAINLESS STEEL STRAZZARI ELLEPTICAL ROTOR PUMP FOR GRAPES AND MARC

### POMPA SERIES G6-150/S

Elliptical rotor pumps for grapes and marc in stainless steel (Rotor 300x150), PATENDED.

Particularly suitable for the transfer of grapes and marc.

Acts by pressure and not by centrifugal force, assures the best possible treatment of the pumped product preventing breakage of the grape-stalks and crushing of the skins and pips.

Refillable automatic lubricator on the seal gear.

Bolted discharge cone, without hinges, openable for inspection of the entire pump interior, Garolla fitting Ø 100.

Stainless steel hopper mm. 700x700 h. 380 INOX, not reclinable, complete with stainless steel auger protection grid.

Stainless steel trolley on wheels for transfer at the company and rubber antivibration pads for Geared motor HP 5,5 380 Volt and stop switch.

Flow rate : 140/150 Q/H

