

SIGMA serie 500


Dati tecnici

Technical specifications

Données techniques

Technische daten

MODELLO	A	B	C	D	D1	E	F	G	H	L	M	N
SIGMA 508	1000	1000	1750	350	350	250	100	180	550	**	1000	**
SIGMA 510	1000	1000	1750	350	350	250	100	180	550	**	1000	**
SIGMA 512	1000	1200	1750	525	350	250	100	180	550	**	1000	**
SIGMA 515	1000	1200	1750	525	350	250	100	180	550	**	1000	**

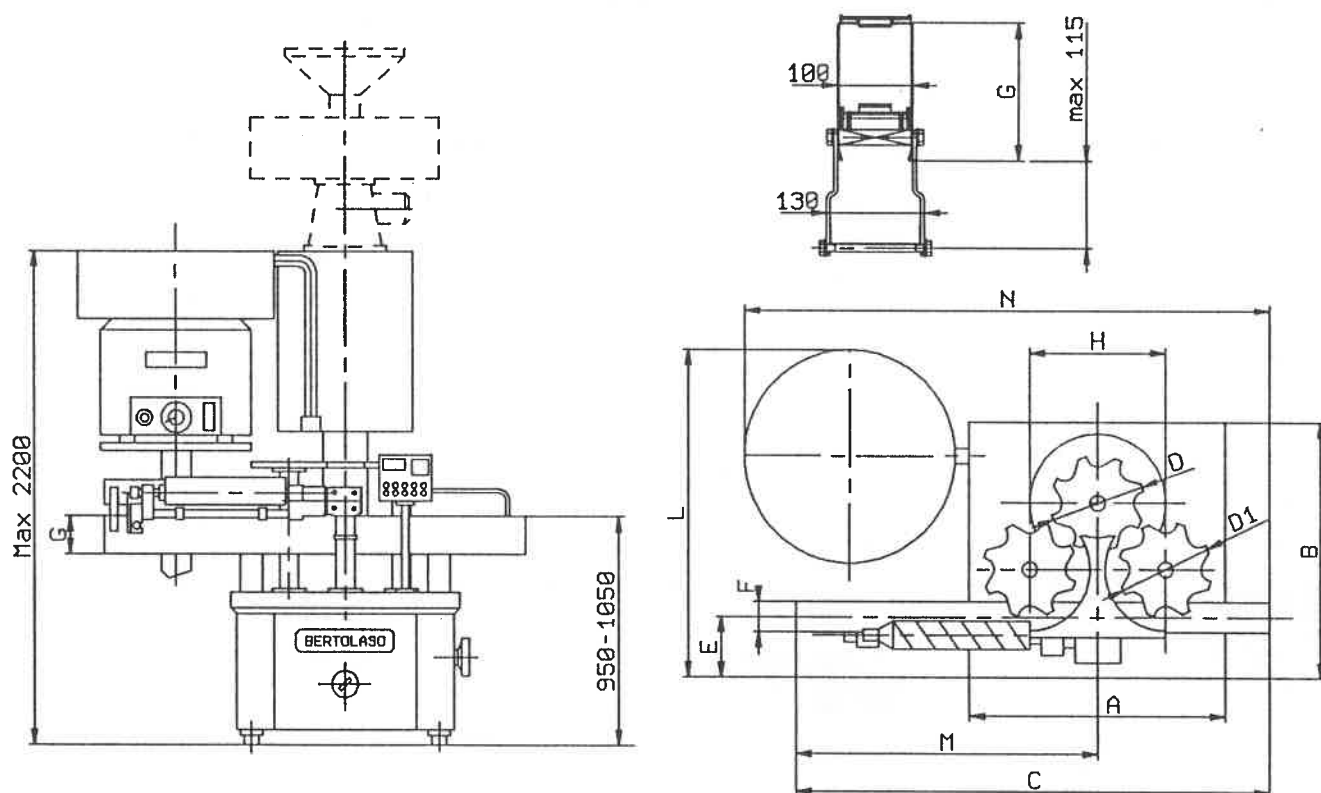

MODELLO SIGMA 500		508	510	512	515
Teste - Heads - Têtes - Köpfe	n°	8	10	12	15
Tipo chiusura - Type of closing - Type de fermeture - Verschlussart		Tappo vite/pressione - Capsule a' vis/a' pression - Screw cap/pressure cap - Druck/Schraubverschluss			
Produzione - Output - Cadence - Leistung (*)	b/h	5250-18000	6500-23000	7800-27000	9750-34000
Diam. bott. - Bottle diam. - Diam. bouteille - Flaschendurchm.	mm	50-120	50-95	50-120	50-95
Alt. bott. - Bottle height - Hauteur bouteille - Flaschenhoehe	mm	70 - 370			
Toll. diam. - Diam. allow. - Tolér. diam. - Durchmesserertoleranz	mm	+/- 2			
Toll. alt. - Height allow. - Tolér. hauteur - Hohenertoleranz	mm	+3			
Peso - Weight - Poids - Gewicht	Kg	1500	1530	1700	1750
Mot. elettr. - Elect. motor - Mot. électr. - Elektr. Motor	Kw	1,5		2,2	
Alim. caps. - Distrib. caps. - Caps distrib. - Kapselzufuehrer (**)	VA				
Tensione - Voltage - Tension - Spannung	V.	220 - 380			
Bassa tensione - Low voltage - Basse tension - Niederspannung	V.	24			
Cons. aria - Air consumption - Cons. air - Luftverbrauch (**)	NL/1				

(*)Secondo tipo bottiglie e capsule - According to bottle and cap samples - Selon format de bouteilles et de capsules - Nach Kapsel- und Flaschenart

(**)Secondo il tipo di alimentatore - According to caps distributor - Selon types de distributeur - Nach Zufuehrer typ